

UTC-318x

18.5" Ubiquitous Touch Computer UTC-318D with Intel® BayTrail J1900



Features

- Low Power & Fanless design
- Built in Intel BayTrail J1900 (UTC-318D)
- Providing Natural Viewing Experience with 16:9 18.5" Display
- Front panel complies with IP65 protection standard
- Landscape & Portrait screen mode support by different applications
- VESA 100 mm standard mounting holes for varied mounting demands
- Attachable frame design , flexible for panel mount applications



Introduction


UTC-318x is the multi-purpose all-in-one computing system which equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. With the removable frame , the system also could fulfill industries or control system applications with panel mounting design. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Specifications

Processor System	CPU	Intel® BayTrail J1900	
	Basic Frequency	2.0 GHz (Quad-Core)	
	L2 Cache	2MB	
	Memory	1 x SO-DIMM DDR3L 1333 MHz up to 8 GB	
	HDD	1 x 2.5 internal SATA HDD bay	
	Network	2 x Gigabit Ethernet ports (RJ-45)	
	I/O ports		1 x RS-232 , 1 x RS-232 / 422 / 485
			5 x USB 2.0 / 1 x USB 3.0
			2 x Gigabit Ethernet (RJ-45)
			1 x HDMI
	Stereo Speaker	Audio Line-out x 1, Mic-in x 1 RJ-11 (option)	
Stereo Speaker	1W x 2		
BUS expansion	Full-size MiniPCIe/mSATA		
Mounting	VESA 100 x 100		
Dimension(WxHxD)	475 x 295 x 43.5 mm		
Weight	5 kg (13.4 lb)		
OS support		Windows Embedded Standard 7 Windows Embedded Standard 8 Embedded Linux 3.0	
Environmental Specifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F)	
	Relative Humidity	10 ~ 95% @ 40° C non-condensing	
	Vibration	0.5G	
	Shock	10 G peak acceleration (11 msec. duration)	
	EMC/ Safety	CE, FCC, UL, CCC CB,BSMI	
	Front Panel Protection	IP65/ NEMA4 Compliant	
Power Supply	Input Rating	12 V/7 A (84W ITE Adapter)	
	Power consumption	Typical 32W Max. 70W	
LCD Display	Size	18.5" TFT LCD	
	Max Resolution	1366 x 768	
	Max Color	16.7M	
	Pixel Pitch (um)	300(H) x 300(V)	
	Brightness (cd/m ²)	250 (Typical)	
	View Angle	170°/160°	
Touch Screen	Type	Analog Resistive 5-wires (Res. Flat Glass) / Projected Capacitive Touch Panel (Pcap. Flat Glass)	
	Light Transmission	Res. Touch : 80% ± 5% / P-Cap Touch : 90% ± 2%	
	Controller	COM interface / USB interface	

Dimensions

Unit: mm

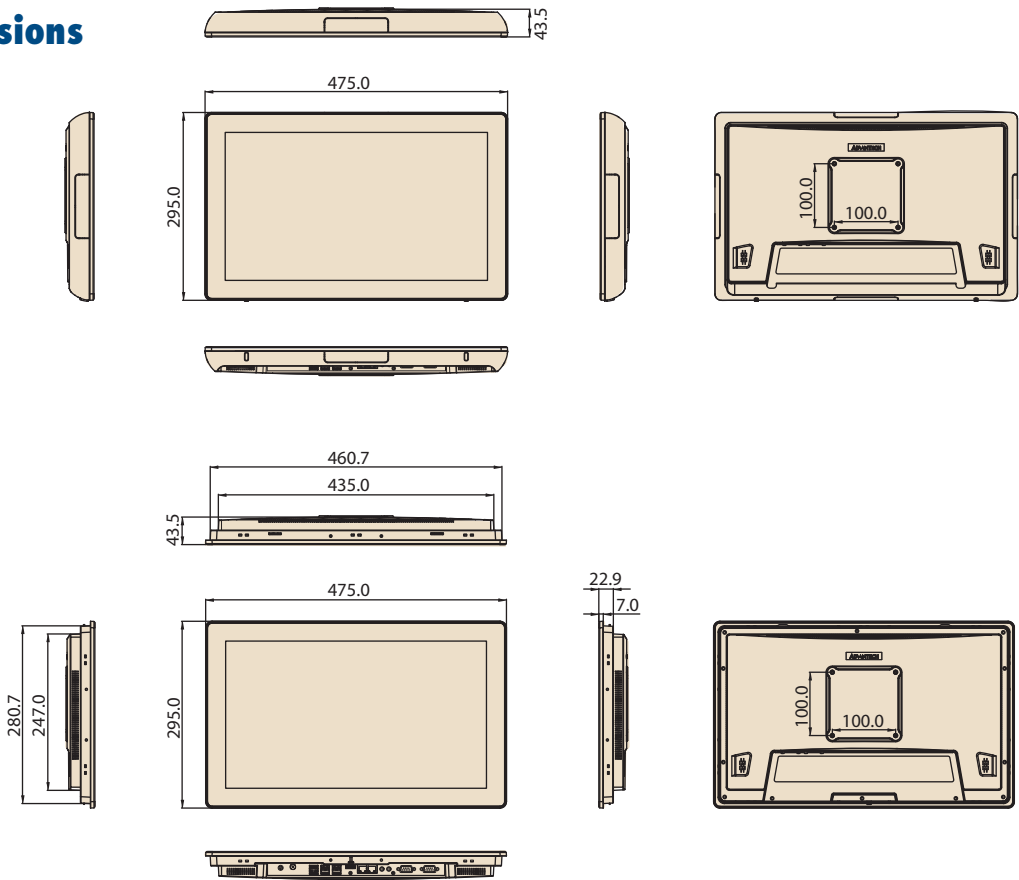


Ordering Information

Part No.	Description
UTC-318D-RE	18.5" White, Intel® Celeron J1900, Res T/S, 4 GB RAM, IT Adapter
UTC-318D-PE	18.5" White, Intel® Celeron J1900, PCap T/S, 4 GB RAM, IT Adapter
UTC-318DR-ATB0E	18.5" Black, Intel® Celeron J1900, Res T/S, 4 GB RAM, IT Adapter
UTC-318DP-ATB0E	18.5" Black, Intel® Celeron J1900, PCap T/S, 4 GB RAM, IT Adapter

Peripherals for UTC-318 series

Part No.	Description
UTC-300P-C20E	5M Camera Module, White, for UTC-318
UTC-300P-C21E	5M Camera Module, Black, for UTC-318
UTC-300P-M20E	Magnet Strip Reader, White, for UTC-318
UTC-300P-M21E	Magnet Strip Reader, Black, for UTC-318
UTC-300P-R20E	RFID Reader, White, for UTC-318
UTC-300P-R21E	RFID Reader, Black, for UTC-318
UTC-300P-S20E	Smart Card Reader, White, for UTC-318
UTC-300P-S21E	Smart Card Reader, Black, for UTC-318
UTC-300P-B20E	1D Barcode Reader, Single Color-Gray, for UTC-318
UTC-300P-B21E	2D Barcode Reader, Single Color-Gray, for UTC-318

Fully- Integrated I/O

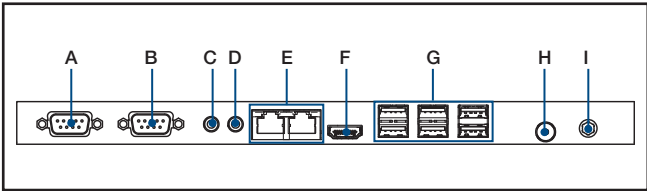

- A. Com1
- B. Com2
- C. Line-out
- D. Mic in
- E. LAN ports x 2
- F. HDMI
- G. USB 2.0 x 5 / USB 3.0 x 1
- H. Power button
- I. DC input 12V_{dc}

Installation Accessory

Part No.	Description
UTC-300P-D20E	Desk Stand, Single Color-Silver, for UTC-318
UTK-500F-A0E	Floor stand with SNBC BTP-U81 thermal printer(for China only)
UTK-500S-A0E	Floor stand without thermal printer
UTK-500G-A0E	Floor stand with thermal printer bracket
UTC-WALL-MOUNT1E	Wall Mount kit
UTC-WALL-MOUNT3E	Wall Mount Kit
UTC-T01-STANDE	Triangle shape floor stand
UTC-H01-STANDE	H-shaped floor stand